Ruíjie | Reyce

RG-M32 3200M Wi-Fi 6 Dual-band Gigabit Mesh* Router

DATASHEET



Highlights

- Next-gen gigabit Wi-Fi 6 standard
- 4x4 Enterprise-level chipset, better stability under heavy load
- 4 Dual-band antennas and 8 signal amplifiers, provide whole-home network coverage
- Exclusive Reyee Mesh solution, one click to mesh up multiple Reyee Mesh devices
- Smart signal indicator, find the best spot to place a sub-router
- Take control of your home network at your fingertips

Highlight Features




Supported by 4x4 Enterprise Level Chipset Enjoy Better Stability under Heavy Load

Tolly proofs that RG-M32 demonstrates more stable network performance at multiple connections.



Ruijie Revee



Equipped with Wi-Fi 6 technology like OFDMA, 1024 QAM, and the latest 802.11ax standard, RG-M32 reaches ultra fast speed, 3200Mbps, enhancing the overall networking experience for users.

Wireless Rate under Real Test


2.4GHz RG-M32

90% higher

The data is supported by Tolly Test under the laboratory condition

Other brand 3000M product

Highlight Features

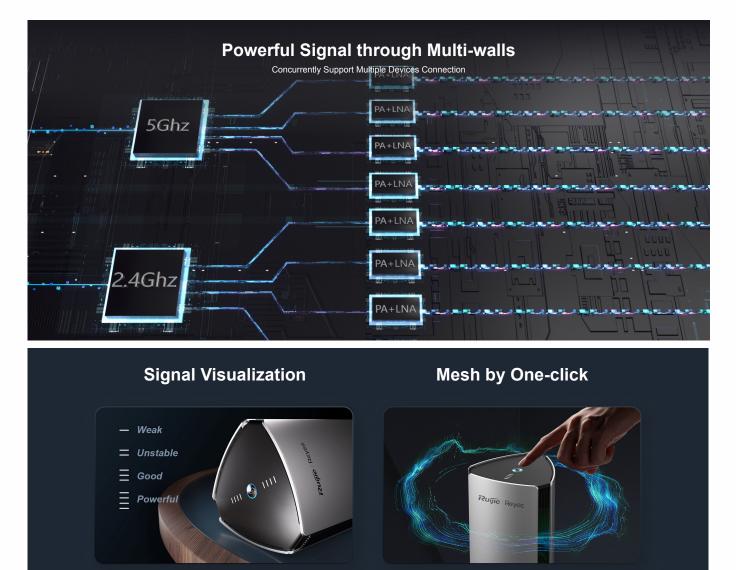


Smart signal indicator guides you tofind the best spot.

You can click the Reyee Mesh button to complete pairing multiple devices with zero configuration.





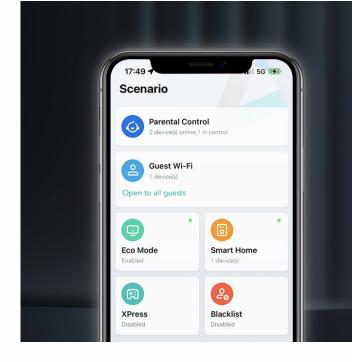

Take Control of Your Home network at Fingertips

Set up your home network in **Reyee Router App** in two minutes. More Life-time Free functions are waiting for you to Explore, Experience, Expect.





Remote Management Parental Control

Smart Home

創



Google Play

 \mathcal{P}_{\oplus}





Basic	
Dimensions (W×D×H)	119 mm × 119 mm × 200 mm (4.7 in. × 5 in. × 7.9 in. antennas not included)
Weight	0.66 kg (packages not included)
Wi-Fi Standards	Wi-Fi 6 (802.11ax)
MIMO	2.4 GHz, 4×4, MU-MIMO 5 GHz, 4×4, MU-MIMO
Max. Wi-Fi Speed	2.4 GHz: 800 Mbps 5 GHz: 2402 Mbps
Channel Width	2.4 GHz: Auto/20/40 MHz 5 GHz: Auto/20/40/80/MHz
Antennas	4 dual-band
Antennas Type	Internal Omnidirectional
Antenna Gain	2.4 GHz: 4 dBi 5 GHz: 4 dBi
WAN Port	1×10/100/1000 Base-T
LAN Ports	3×10/100/1000 Base-T
Recommended Users	60
Max. Users	192
Power Supply	DC 12V/2.5A
Power Consumption	< 30 W
Operation Frequency Bands	802.11b/g/n: 2.400 GHz to 2.483 GHz 802.11a/n/ac: 5.150 GHz to 5.350 GHz 802.11a/n/ac/ax: 5.470 GHz to 5.725 GHz , 5.725 GHz to 5.850 GHz country-specific restrictions apply
Transmit Power	CE EIRP: ≤20dBm (2.4GHz) ≤27dBm (5GHz) ≤20dBm 2400~2483.5MHz(Bluetooth) 2400~2483.5MHz ≤ 20dBm(EIRP) 5150~5350MHz ≤ 23dBm(EIRP) 5470~5725MHz ≤ 30dBm(EIRP) 5725~5850MHz ≤ 30dBm(EIRP)



	Basic
Receive Sensitivity	2.4 GHz: 802.11b: -96 dBm(1 Mbps) 802.11g: -91 dBm(6 Mbps), -85 dBm(54 Mbps) 802.11n: -90dBm(MCS0), -85 dBm(MCS7) 5 GHz: 802.11n: -90 dBm(MCS0), -70 dBm(MCS7) 802.11a: -88 dBm(6 Mbps), -60 dBm(54 Mbps) 802.11ac: -82dBm(MCS0), -57dBm(MCS7), -52dBm(MCS9)
Operating Temperature	-10 °C to +45 °C (14 °F to 113 °F)
Operating Humidity	5% to 95% Noncondensing
Certifications	CE, SIRIM, RCM RoHS
Wireless	
OFDMA	\checkmark
MU-MIMO	\checkmark
BSS Coloring	\checkmark
Maximum Number of SSIDs	6
SSID Hiding	\checkmark
Band Steering	\checkmark
Guest Wi-Fi	\checkmark
WPA/WPA2	\checkmark
WPA3	-
Roaming	Layer 3 Roaming
Blacklist	\checkmark
Reyee Mesh	\checkmark
Mesh Pairing by Hardware	\checkmark
Mesh Pairing by Mesh Button	\checkmark
Mesh Pairing by Eweb	\checkmark



	Wireless	
Recommended Hop Count	≤2	
Wi-Fi Optimization	\checkmark	
QoS (WMM)	\checkmark	
WPS	-	
Transmission Power Adjustment	\checkmark	
Hardwaro		

Hardware	
CPU	MT7622B+MT7911AN+MT7915AN
Flash	16 MB
RAM/SDRAM	256 MB
Color	Black
System LED Indicator	\checkmark
Reyee Mesh LED Indicator	\checkmark
Reyee Mesh Button	\checkmark
Power Button	-
Reset Button	\checkmark
DC Connector Dimensions	Outer Diameter: 5.5 mm Inner Diameter: 2.0 mm Length: 11.5 mm (Outer Diameter: 0.22 in.

WAN		
Static IP	\checkmark	
DHCP	\checkmark	
PPPoE	\checkmark	

Inner Diameter: 0.07 in. Length: 0.39 in.)



WAN



Security	
PPTP VPN Server	\checkmark
PPTP VPN Client	\checkmark
L2TP VPN Client	-
Parental Control	Time Schedule
Protect TCP Flood Attacks	\checkmark
Protect ICMP Attacks	-
Protect UDP Flood Attacks	-
	System
Default Access/Password	192.168.110.1 No Password Required by Default
URL Access	\checkmark
Local Upgrade	\checkmark
Online Upgrade	\checkmark
APP Upgrade	\checkmark
Syslog	\checkmark
Backup	\checkmark
Factory Reset	\checkmark
Language	Chinese English Vietnamese Indonesian Thai Arabic Traditional Chinese Spanish Russian

Package Contents

Package Information	RG-M32
Wireless Router	1
Power Adapter	1
Quick Start Guide	1
Cat5E UTP Cable	1

Rujje Rcycc

Redefine your easy network

Copyright ©2000-2023 Ruijie Networks Co., Ltd. All rights reserved.

No part of this document may be reproduced or transmitted in any form or any means without prior written consent of Ruijie Networks Co., Ltd.

Notice

This content is applicable only to regions outside the China mainland. Ruijie Networks Co., Ltd. reserves the right to interpret this content.

The information contained herein is subject to change without notice. Nothing herein should be construed as constituting an additional warranty. Ruijie Networks Co., Ltd. shall not be liable for technical or editorial errors or omissions contained herein.



Ruijie Networks Co., Ltd. Building 19, Juyuanzhou Industrial Park, No.618 Jinshan Road, Cangshan District, Fuzhou, Fujian, China Website: https://www.ruijienetworks.com